


Product Selection Guide

Customer requirement

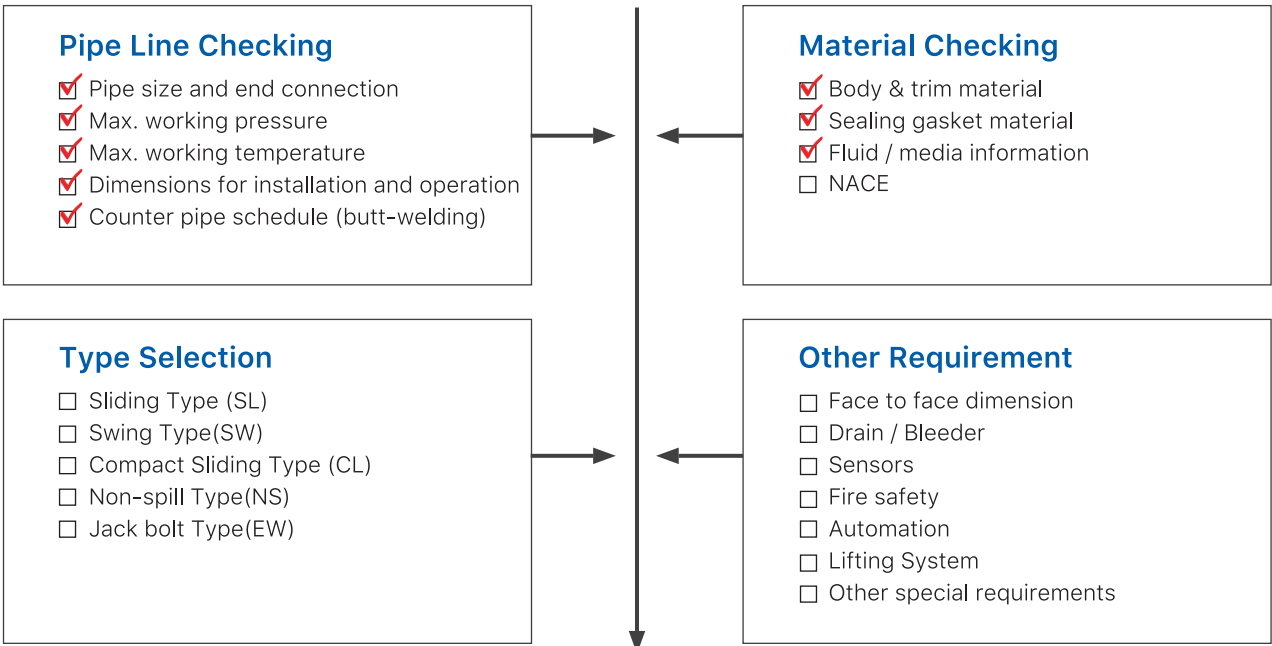

Custom SAMMI LINE BLIND

Product Code

SW 8 – AN300 – CS / 304 / FKM

(a)	(b)	(c)	(d)	(e)	(f)
<p>Size</p> <p>ex) 8 = NPS 8 = DN200 = 200A</p>		<p>Class</p> <p>AN300: ASME Class 300 PN16 : DIN PIN 16 JS20 : JIS Class 20 kg/cm²</p>		<p>Body Material</p> <p>ex) C S : Carbon Steel 304 : Stainless Steel 304 C276: Hastelloy C276</p>	
<p>Type</p> <p>SW: Swing Type SL : Sliding Type CL : Compact Type NS : Non-Spill Type EW : Jack Bolt Swing Type EL : Jack Bolt Sliding Type</p>		<p>Blind Material</p> <p>ex) C S : Carbon Steel 304 : Stainless Steel 304 C276: Hastelloy C276</p>			
<p>Sealing Material</p> <p>NBR / HNBR : Nitrill Butadiene Rubber, Buna-N FKM / FPM : Viton FEPV / PFAV / PFAS : Teflon Encapsulated O-ring VMQ / FVMQ : Silicone, Fluorosilicone EPDM : Ethylene Propylene Rubber FFKM / FFPM : Perfluoro Elastomer, Kalrez, Chemrez GR : Graphite mold, Spiral wound gasket, Soft Metal</p>					